

CHICAGO TAPERS™



CHICAGO TAPERS™

CHICAGOTAPERS.COM

CHICAGOTAPERS.COM

JOIN THE INNOVATION

JOIN THE INNOVATION

CT-32 FC
AUTOMATIC CASE SEALER

CT-32 FC
AUTOMATIC CASE SEALER

CONTACT US

708 - 588 - 1374
708 - 588 - 1625
sales@chicagotapers.com



CT-32 FC AUTOMATIC CASE SEALER



The CT-32 FC Automatic Case Sealer automatically closes the top case flaps and seals them with tape. Exclusive features of the machine are interlocked safety guarding, welded frame with adjustable legs and open face tape heads.

TECHNICAL SPECIFICATIONS FOR THE CT-32 FC:

Case range:	min. 6" x 5" x 5" max. 20 x 20" x 27" (L x W x H)
Belt speed:	60ft./min. (optional 90ft./min.)
Case weight:	Up to 50 lbs.
Throughput:	Up to 20 cases/min. Case sealers require spacing of 18" or more between cases. If this spacing cannot be maintained a separating system will be required.
Finish:	Painted exterior finish.
Taping heads:	Blue Max taping heads for 2" wide tape.
Power requirements:	110 VAC, 1 Ph, 60 Hz, 5.6 Amp. or to requirement.
Side belts:	2.50" wide, self-centering side belts.
Table height:	22" - 36".
Machine dimension:	74" x 38" x 75" (L x W x H)
Pneumatic:	45 PSI, 2 CFM

FEATURES

BENEFITS

Centralized case adjustments.	Fast & easy size change improves efficiency.
Heavy - duty welded frames.	Durable construction for demanding applications.
Painted finish.	Resist weather, staining and chemicals.
Full lexan guarding.	Clear guarding provides operator convenience and safety.



CT-32 FC OPTIONS:

- Reverse direction.
- Pack tables.
- Nema 4 wiring.
- Low tape alarm.
- Extra case length.
- Full steel roller bed.
- Customer specified finish.
- Optional OK Blue Max 3" tape head.
- Compression wheels.
- Exit conveyors.
- Casters.




CT-32 FC

CT-32FC FULLY AUTOMATIC CASE TAPER

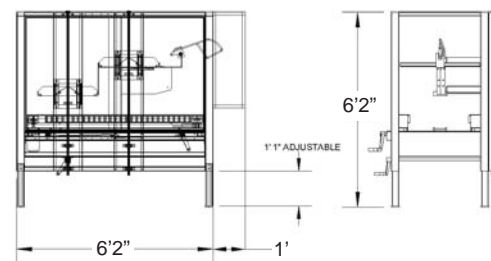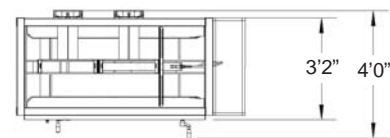

SERVING MANY DIFFERENT INDUSTRIES:

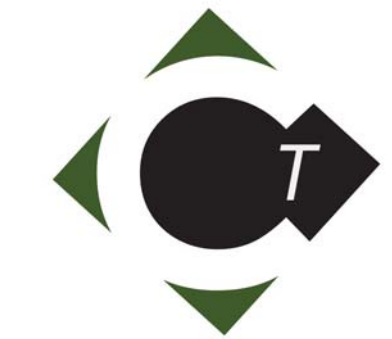

CHICAGOTAPERS™

Chicago Tapers
5117 Dansher Road
Countryside, IL 60525 USA
tel: 708.588.1374
fax: 708.588.1625
sales@chicagotapers.com